
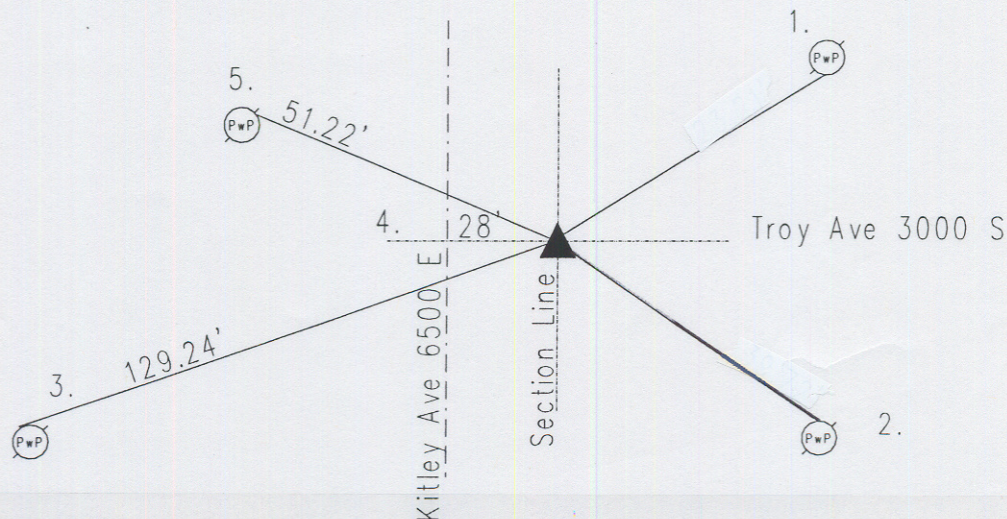


E: 66777.7950 (m)



**CORNER HISTORY:** Corner originally set as a post in 1820 by John Hendricks with witness: 24" white Oak S 32 W 17 links; 7" hickory N 11 E 17 links per Marion County Atlas pg. 10. A survey 3-24-1851 by D.B. Hosbrook only distances to a point per Franklin Township Legal Survey Book pg. 2. Survey 5-19-1880 by H. B. Fatout called distances only. Reference dated 3-1-1962 by G. Schmidt called found railroad spike. Reference dated 10-15-75 by Wilcoxon called iron pipe. Reference dated 7-23-1987 by Gries called set railroad spike. Reference dated 7-1-97 by Whiteside called set Harrison per ties , found railroad spike but no pipe was found. Reference dated 8-10-07 by Wilcoxon called found Harrison.

REF.	DISTANCE	DESCRIPTION
1.	23.28'	PK nail w/shiner S guy pole no#
2.	40.06'	✓ nail N PwP#23-646 B (mag, nail w/bw 12"up)
3.	129.24'	PK nail NW PwP#22-646 B 18"up
4.	28'+/-	Due W to C/L of Kitley Avenue
5.	51.22'	PK nail NE PwP#167-646 6"up